



IN THE MATTER OF  
PATENT APPLICATION NO. 10/702,449  
IN THE NAME OF NEC Corporation

DECLARATION

I, Yoshio Nagasaki, c/o YAMASHITA & ASSOCIATES of  
TORANOMON 40TH MT BLDG., 5-13-1, TORANOMON, MINATO-KU, TOKYO,  
JAPAN, 105, do solemnly and sincerely declare that I well  
understand the Japanese language and the English language and  
that the attached English translation of a certified copy of  
Japanese Patent Application No. 2002-325263 is a true,  
correct and faithful translation to the best of my knowledge  
and belief from the Japanese language into the English  
language.

Dated this 27th day of August, 2007

Yoshio Nagasaki  
(translator)

(Translation)

PATENT OFFICE  
JAPANESE GOVERNMENT

This is to certify that the annexed is a true  
copy of the following application as filed with this Office.

Date of Filing: November 8, 2002

Application Number: Application for Patent No. 2002-325263

Applicant: NEC Corporation

Date: October 10, 2003

YASUO IMAI  
Commissioner,  
Patent Office

- 1 -

[Document Name] APPLICATION FOR PATENT  
[Reference Number] 68501948  
[Addressee] Commissioner of Patent Office  
[IPC] H04N 5/92  
[Inventor]  
[Inventor]  
[Address] c/o NEC Corporation,  
7-1, Shiba 5-chome, Minato-ku,  
Tokyo  
[Name] Takuya MORISHITA  
[Applicant]  
[Identification Number] 000004237  
[Name] NEC Corporation  
[Agent]  
[Identification Number] 100093595  
[Patent Attorney]  
[Name] Masao MATSUMOTO  
[Indication of Official Fee]  
[Number of Deposit Account] 057794  
[Amount of Payment] 21000  
[List of Attached Documents]  
[Name of Document] Specification 1  
[Name of Document] Drawings 1  
[Name of Document] Abstract 1  
[General Power of Attorney Number] 9303563  
[Need or not of Proof] need

- 1 -

[Name of Document] SPECIFICATION

[Title of the Invention] EDITION APPARATUS AND VIDEO EDITION PROGRAM

[Claims]

[Claim 1] A video edition apparatus for editing video/audio data in which image and sound data are multiplexed, characterized by comprising:

edition control means for rewriting a header of video data in a range designated by a deletion start frame and deletion end frame with respect to the video/audio data which is an edition object to constitute nullified data and for rewriting a header of audio data including the same synchronous reproduction time in the designated range to constitute the nullified data.

[Claim 2] The video edition apparatus according to claim 1, characterized in that an ID of the header of the video data and the audio data in the designated range is rewritten with a padding stream ID to constitute the nullified data.

[Claim 3] The video edition apparatus according to claim 1 or 2, characterized in that the edition control means re-encodes the frame next to the deletion end frame of the video data as a frame which does not require information of another frame in extension to nullify the video data to the deletion end frame from the deletion start frame, when the next frame is not the frame not requiring the information of the other frame in the extension.

[Claim 4] The video edition apparatus according to any one of claims 1 to 3, characterized in that the edition control means removes the nullified video/audio data part and writes the video/audio data into a writable recording medium, when duplicating the edited video/audio data in the recording medium.

[Claim 5] The video edition apparatus according to claim 4,

- 2 -

characterized in that the edition control means judges the nullified video/audio data part based on a stream ID of the video/audio data to remove the nullified video/audio data part, and writes the video/audio data in the writable recording medium, when duplicating the edited video/audio data in the recording medium.

[Claim 6] The video edition apparatus according to claim 4 or 5, characterized in that the edition control means acquires a reproduction time of the video data before/after the nullified video/audio data part, obtains a difference between the reproduction time before the nullified video/audio data part and that after the nullified video/audio data part, which is an offset value, uses the offset value to correct the reproduction time of the video/audio data of and after the nullified video/audio data part, and writes the video/audio data in the recording medium.

[Claim 7] The video edition apparatus according to claim 4 or 5, characterized in that the edition control means acquires a reproduction time of the video data before/after the nullified video/audio data part, obtains a difference between the reproduction time before the nullified video/audio data part and that after the nullified video/audio data part, which is an offset value, and uses the offset value to correct the reproduction time of the video/audio data of and after the nullified video/audio data part in a nullification process of the video/audio data.

[Claim 8] The video edition apparatus according to claim 4, characterized in that the edition control means rewrites the video data and the audio data in the designated range, using a private header indicating a data size to be nullified, to constitute the nullified data, and skips reading the nullified video/audio data part, referring to the data size of the private header, to write the video/audio data in the

- 3 -

recording medium, when duplicating the edited video/audio data into the writable recording medium.

[Claim 9] The video edition apparatus according to any one of claims 1 to 8, characterized by comprising: edition position extraction means for extracting a format change part of the audio data in the video/audio data which is the edition object to provide a range of the video data including the same reproduction time as that in the format change part as the deletion start frame and the deletion end frame.

[Claim 10] The video edition apparatus according to any one of claims 1 to 9, characterized in that the video/audio data is MPEG data, and packet headers of the video data and the audio data are rewritten to constitute the nullified data.

[Claim 11] The video edition apparatus according to claim 10, characterized in that the edition control means re-encodes the frame next to the deletion end frame of the video data as an I frame to nullify the video data including the deletion start frame to the deletion end frame, when the next frame is not the I frame.

[Claim 12] A video edition program for controlling a computer apparatus to edit video/audio data in which image and sound data are multiplexed, characterized by executing functions of:

rewriting a header of video data in a range designated by a deletion start frame and deletion end frame with respect to the video/audio data which is an edition object to constitute nullified data; and rewriting a header of audio data including the same synchronous reproduction time in the designated range to constitute the nullified data.

[Claim 13] The video edition program according to claim 12, characterized by comprising function of rewriting an ID of the header of the video data and the audio data in the designated range with a padding stream ID to constitute the

- 4 -

nullified data.

[Claim 14] The video edition program according to claim 12 or 13, characterized by comprising function of re-encoding the frame next to the deletion end frame of the video data as a frame which does not require information of another frame in extension to nullify the video data to the deletion end frame from the deletion start frame, when the next frame is not the frame not requiring the information of the other frame in the extension.

[Claim 15] The video edition program according to any one of claims 12 to 14, characterized by comprising function of removing the nullified video/audio data part and writing the video/audio data into a writable recording medium, when duplicating the edited video/audio data in the recording medium.

[Claim 16] The video edition program according to claim 15, characterized by comprising functions of judging the nullified video/audio data part based on a stream ID of the video/audio data to remove the nullified video/audio data part, and writing the video/audio data in the writable recording medium, when duplicating the edited video/audio data in the recording medium.

[Claim 17] The video edition program according to claim 15 or 16, characterized by comprising functions of acquiring a reproduction time of the video data before/after the nullified video/audio data part, obtaining a difference between the reproduction time before the nullified video/audio data part and that after the nullified video/audio data part, which is an offset value, using the offset value to correct the reproduction time of the video/audio data of and after the nullified video/audio data part, and writing the video/audio data in the recording medium.

- 5 -

[Claim 18] The video edition program according to claim 15 or 16, characterized by comprising functions of acquiring a reproduction time of the video data before/after the nullified video/audio data part, obtaining a difference between the reproduction time before the nullified video/audio data part and that after the nullified video/audio data part, which is an offset value, and using the offset value to correct the reproduction time of the video/audio data of and after the nullified video/audio data part in a nullification process of the video/audio data.

[Claim 19] The video edition program according to claim 15, characterized by comprising functions of rewriting the video data and the audio data in the designated range, using a private header indicating a data size to be nullified, to constitute the nullified data, and skipping reading the nullified video/audio data part, referring to the data size of the private header, to write the video/audio data in the recording medium, when duplicating the edited video/audio data into the writable recording medium.

[Claim 20] The video edition program according to any one of claims 12 to 19, characterized by comprising functions of extracting a format change part of the audio data in the video/audio data which is the edition object to provide a range of the video data including the same reproduction time as that in the format change part as the deletion start frame and the deletion end frame.

[Claim 21] The video edition program according to any one of claims 12 to 20, characterized in that the video/audio data is MPEG data, and packet headers of the video data and the audio data are rewritten to constitute the nullified data.

[Claim 22] The video edition program according to claim 21, characterized in that the edition control means re-encodes the frame next to the deletion end frame of the video data as



- 6 -

an I frame to nullify the video data including the deletion start frame to the deletion end frame, when the next frame is not the I frame.

[Detailed Description of the Invention]

[0001]

[Field of the Invention]

The present invention relates to a video edition apparatus, particularly to a video edition apparatus which is capable of editing data constituted by multiplexing image and sound data at a high rate.

[0002]

[Prior Art]

One example of a conventional video edition apparatus is described in Japanese Patent Application Laid-Open No. 11-155128. The conventional video edition apparatus described in this publication will hereinafter be described with reference to the drawings.

[0003]

As shown in FIG. 6, this conventional video edition apparatus is constituted of a DVD-RAM drive 1 and a host system 2.

[0004]

The DVD-RAM drive 1 roughly includes a main control unit (CPU) 10, an input/output interface 11, a data management table 12, an access control unit 13, a disk (DVD) 14, and an encoder/decoder 15.

[0005]

An outline of an operation of the conventional video edition apparatus constituted as described above will hereinafter be described.

[0006]

That is, the CPU 10 of the DVD-RAM drive 1 records (telerecords) digital image information transferred from the

- 7 -

host system 2 via the input/output interface 11 in the disk 14.

[0007]

Next, in response to a command from the host system 2 accompanying a user's input operation, the CPU 10 reads the recorded image information from the disk 14, and transfers the information to the host system 2 via the input/output interface 11.

[0008]

Here, it is assumed that a user checks a screen to indicate a cut position for cutting image data in a first half of the image information. The CPU 10 specifies a group of pictures (GOP) corresponding to the indicated cut position, and the cut position in the GOP based on management information of the data management table 12.

[0009]

The CPU 10 uses the specified cut position of GOP as a reference position to detect a picture type of a top part of the image data part of a last half. In this case, the CPU 10 refers, for example, to a GOP header to recognize the picture type of the top part. Here, when the picture type of the top part is an I type, the CPU 10 converts the image data part of the first half in which the cut position is the reference position to a reproduction nullified data. This reproduction nullified data means user data which is incapable of being reproduced as the image information.

[0010]

On the other hand, when the picture type of the top part is not the I (intra picture) type, the CPU 10 controls the encoder/decoder 15 to execute a process of converting the picture type of the top part to the I type.

[0011]

The CPU 10 executes a process of expanding a region

- 8 -

of the image data part of the last half to a region of the first half by an increase obtained by the conversion to the picture data of the I type. Moreover, the CPU 10 converts the image data part of the first half to reproduction nullified data to produce new GOP.

[0012]

After executing the conversion process in the GOP, the CPU 10 sets a management table A for managing the image information including the newly produced GOP, and a management table B for managing the image information which is a cut object. In the data management table 12, the image information managed by the management table A is managed as continuous reproduction data. On the other hand, the image information which is the cut object is managed as irreproducible data.

[0013]

[Problem that the Invention is to Solve]

However, the above-described conventional video edition apparatus has the following problems.

[0014]

A first problem is that data in which image and sound data are multiplexed cannot be edited. A reason for this is that means for nullifying the sound data is not disposed.

[0015]

A second problem is that correct reproduction of the edited data can be guaranteed only on a decoder having a function of interpreting the management table. This is because time information for synchronously reproducing the image and sound is not correct after the edition.

[0016]

A third problem is that the a nullified data region remains on the disk after the edition and a disk capacity is

- 9 -

wasted. This is because means for deleting the nullified data region after the edition is not disposed.

[0017]

A fourth problem is that an edition point needs to be manually designated by the user. This is because means for automatically providing candidates for the edition point to the user is not disposed.

[0018]

An object of the present invention is to provide a video edition apparatus capable of editing the video/audio data in which the image and sound data are multiplexed at a high rate.

[0019]

Another object of the present invention is to provide a video edition apparatus which is capable of reproducing the edited data even on a usual reproduction device.

[0020]

Still another object of the present invention is to provide a video edition apparatus which can effectively use the capacity of a recording medium, when duplicating the video/audio data in the recording medium.

[0021]

[Means for Solving the Problems]

In order to achieve the foregoing object, there is provided a video edition apparatus for editing video/audio data in which image and sound data are multiplexed, characterized by comprising: edition control means for rewriting a header of video data in a range designated by a deletion start frame and deletion end frame with respect to the video/audio data which is an edition object to constitute nullified data and for rewriting a header of audio data including the same synchronous reproduction time in the

- 10 -

designated range to constitute the nullified data.

[0022]

The video edition apparatus according to the present invention of claim 2 is characterized in that an ID of the header of the video data and the audio data in the designated range is rewritten with a padding stream ID to constitute the nullified data.

[0023]

The video edition apparatus according to the present invention of claim 3 is characterized in that the edition control means re-encodes the frame next to the deletion end frame of the video data as a frame which does not require information of another frame in extension to nullify the video data to the deletion end frame from the deletion start frame, when the next frame is not the frame not requiring the information of the other frame in the extension.

[0024]

The video edition apparatus according to the present invention of claim 4 is characterized in that the edition control means removes the nullified video/audio data part and writes the video/audio data into a writable recording medium, when duplicating the edited video/audio data in the recording medium.

[0025]

The video edition apparatus according to the present invention of claim 5 is characterized in that the edition control means judges the nullified video/audio data part based on a stream ID of the video/audio data to remove the nullified video/audio data part, and writes the video/audio data in the writable recording medium, when duplicating the edited video/audio data in the recording medium.

[0026]

The video edition apparatus according to the present

- 11 -

invention of claim 6 is characterized in that the edition control means acquires a reproduction time of the video data before/after the nullified video/audio data part, obtains a difference between the reproduction time before the nullified video/audio data part and that after the nullified video/audio data part, which is an offset value, uses the offset value to correct the reproduction time of the video/audio data of and after the nullified video/audio data part, and writes the video/audio data in the recording medium.  
[0027]

The video edition apparatus according to the present invention of claim 7 is characterized in that the edition control means acquires a reproduction time of the video data before/after the nullified video/audio data part, obtains a difference between the reproduction time before the nullified video/audio data part and that after the nullified video/audio data part, which is an offset value, and uses the offset value to correct the reproduction time of the video/audio data of and after the nullified video/audio data part in a nullification process of the video/audio data.  
[0028]

The video edition apparatus according to the present invention of claim 8 is characterized in that the edition control means rewrites the video data and the audio data in the designated range, using a private header indicating a data size to be nullified, to constitute the nullified data, and skips reading the nullified video/audio data part, referring to the data size of the private header, to write the video/audio data in the recording medium, when duplicating the edited video/audio data into the writable recording medium.  
[0029]

The video edition apparatus according to the present

- 12 -

invention of claim 9 is characterized by comprising: edition position extraction means for extracting a format change part of the audio data in the video/audio data which is the edition object to provide a range of the video data including the same reproduction time as that in the format change part as the deletion start frame and the deletion end frame.

[0030]

The video edition apparatus according to the present invention of claim 10 is characterized in that the video/audio data is MPEG data, and packet headers of the video data and the audio data are rewritten to constitute the nullified data.

[0031]

The video edition apparatus according to the present invention of claim 11 is characterized in that the edition control means re-encodes the frame next to the deletion end frame of the video data as an I frame to nullify the video data including the deletion start frame to the deletion end frame, when the next frame is not the I frame.

[0032]

According to the present invention of claim 12, there is provided a video edition program for controlling a computer apparatus to edit video/audio data in which image and sound data are multiplexed, characterized by executing functions of: rewriting a header of video data in a range designated by a deletion start frame and deletion end frame with respect to the video/audio data which is an edition object to constitute nullified data; and rewriting a header of audio data including the same synchronous reproduction time in the designated range to constitute the nullified data.

[0033]

The video edition program according to the present invention of claim 13 is characterized by comprising function

- 13 -

of rewriting an ID of the header of the video data and the audio data in the designated range with a padding stream ID to constitute the nullified data.

[0034]

The video edition program according to the present invention of claim 14 is characterized by comprising function of re-encoding the frame next to the deletion end frame of the video data as a frame which does not require information of another frame in extension to nullify the video data to the deletion end frame from the deletion start frame, when the next frame is not the frame not requiring the information of the other frame in the extension.

[0035]

The video edition program according to the present invention of claim 15 is characterized by comprising function of removing the nullified video/audio data part and writing the video/audio data into a writable recording medium, when duplicating the edited video/audio data in the recording medium.

[0036]

The video edition program according to the present invention of claim 16 is characterized by comprising functions of judging the nullified video/audio data part based on a stream ID of the video/audio data to remove the nullified video/audio data part, and writing the video/audio data in the writable recording medium, when duplicating the edited video/audio data in the recording medium.

[0037]

The video edition program according to the present invention of claim 17 is characterized by comprising functions of acquiring a reproduction time of the video data before/after the nullified video/audio data part, obtaining a difference between the reproduction time before the nullified



- 14 -

video/audio data part and that after the nullified video/audio data part, which is an offset value, using the offset value to correct the reproduction time of the video/audio data of and after the nullified video/audio data part, and writing the video/audio data in the recording medium.

[0038]

The video edition program according to the present invention of claim 18 is characterized by comprising functions of acquiring a reproduction time of the video data before/after the nullified video/audio data part, obtaining a difference between the reproduction time before the nullified video/audio data part and that after the nullified video/audio data part, which is an offset value, and using the offset value to correct the reproduction time of the video/audio data of and after the nullified video/audio data part in a nullification process of the video/audio data.

[0039]

The video edition program according to the present invention of claim 19 is characterized by comprising functions of rewriting the video data and the audio data in the designated range, using a private header indicating a data size to be nullified, to constitute the nullified data, and skipping reading the nullified video/audio data part, referring to the data size of the private header, to write the video/audio data in the recording medium, when duplicating the edited video/audio data into the writable recording medium.

[0040]

The video edition program according to the present invention of claim 20 is characterized by comprising functions of extracting a format change part of the audio data in the video/audio data which is the edition object to

- 15 -

provide a range of the video data including the same reproduction time as that in the format change part as the deletion start frame and the deletion end frame.

[0041]

The video edition program according to the present invention of claim 21 is characterized in that the video/audio data is MPEG data, and packet headers of the video data and the audio data are rewritten to constitute the nullified data.

[0042]

The video edition program according to the present invention of claim 22 is characterized in that the edition control means re-encodes the frame next to the deletion end frame of the video data as an I frame to nullify the video data including the deletion start frame to the deletion end frame, when the next frame is not the I frame.

[0043]

[Means for Solving the Problems]

Preferable embodiments of the present invention will hereinafter be described in detail with reference to the drawings. FIG. 1 is a block diagram showing a constitution of a video edition apparatus according to a first embodiment of the present invention. It is to be noted that FIG. 1 shows only a characteristic constitution of the first embodiment, and depiction of another general constitution is omitted.

[0044]

Referring to FIG. 1, the video edition apparatus according to the present embodiment is constituted of a video edition apparatus 100 operated by program control, a file device 200, and a recording medium 300.

[0045]

The video edition apparatus 100 is constituted of a

- 16 -

computer including a program-controlled CPU, memory, and the like, and the apparatus includes edition control means 101, file read means 102, decode means 103, encode means 104, and file write means 105.

[0046]

The edition control means 101 obtains a range of video/audio data to be deleted from a deletion start frame and a deletion end frame designated by a user with respect to the video/audio data, and replaces a header of the video/audio data to be deleted with a padding header to nullify the video/audio data of a deleted part.

[0047]

The file read means 102 reads the video/audio data constituting an edition object from the file device 200 in which the video/audio data is recorded to supply the data to the edition control means 101.

[0048]

The decode means 103 decodes encoded video data. The encode means 104 encodes the decoded video data. For these decode means 103 and encode means 104, means which have heretofore been provided can be used as they are.

[0049]

The file write means 105 writes the video/audio data whose deleted part is nullified with respect to the file device 200, and removes the video/audio data nullified when reproducing the video/audio data in the recording medium 300 from the file device 200 to write the data in the recording medium 300.

[0050]

The file device 200 is constituted, for example, of a hard disk drive in which the video/audio data is to be recorded. The recording medium 300 is a medium in which the video/audio data can be written, such as CD (e.g., CD-R and

- 17 -

CD-RW) and DVD (e.g., DVD-RAM and DVD-R).

[0051]

Next, a whole operation of the video edition apparatus according to the present embodiment constituted as described above will be described in detail with reference to FIG. 1 and a flowchart of FIG. 2.

[0052]

First, the user operates the video edition apparatus 100 to designate the video/audio data constituting the edition object. Accordingly, the file read means 102 reads the video/audio data constituting the edition object from the file device 200 in which the video/audio data (e.g., MPEG data) is recorded to supply the data to the edition control means 101 (step 201).

[0053]

Subsequently, for the read video/audio data, the user designates a deletion start frame to start deletion and a deletion end frame to end the deletion with respect to the edition control means 101 (step 202).

[0054]

The edition control means 101 searches a data position of an encoded display start frame to be displayed next to the deletion end frame (step 203).

[0055]

The edition control means 101 checks whether the encoded display start frame is encoded in an I type (frame which does not require information of another frame in extension), P type, or B type (frame which requires the information of the other frame in the extension) (step 204).

[0056]

When the type of the display start frame is the I type, the edition control means 101 sets a broken link flag (flag raised when cutting and linking GOP) of GOP header

- 18 -

including the display start frame (step 205).

[0057]

When the display start frame is of the P type or the B type, the edition control means 101 acquires an I frame referred to by the display start frame from the file read means 102. The decode means 103 successively receives and decodes video frames encoded from the I frame referred to by the display start frame from the edition control means 101, and finally decodes the display start frame (step 206).

[0058]

The encode means 104 receives the decoded display start frame from the edition control means 101 to encode the frame as the I frame anew (step 207).

[0059]

The encode means 104 uses the re-encoded display start frame as a reference frame to encode video frames to the next appearing I frame anew (step 208). At this time, before/after performing the re-encoding, a data size of the video frame differs, but original data is overwritten so that a terminal end of the re-encoded data agrees with that of the data before the re-encoding.

[0060]

The edition control means 101 rewrites stream ID of a packet header of all video data to the deletion end frame before the re-encoded display start frame from the deletion start frame with a padding stream ID value to replace a video packet of the video data with a padding packet (step 209). Accordingly, the deleted part designated by the deletion end frame from the deletion start frame is nullified.

[0061]

The edition control means 101 calculates a presentation time stamp (PTS) value of a synchronous reproduction time which is time information for synchronous

- 19 -

reproduction with respect to the frames in the range designated by the deletion start frame and the deletion end frame. The means also similarly rewrites the stream ID of the audio data having the PTS value in the corresponding range into the padding stream ID value to replace the audio packet of the audio data with the padding packet (step 210).  
[0062]

The edition control means 101 repeatedly executes the process for the replacement with the padding packet, when a plurality of deletion start frames and deletion end frames are designated by the user (step 211).  
[0063]

The video/audio data whose has been edited as described above is written in the file device 200 by the file write means 105 (step 212).  
[0064]

An operation for duplicating the edited video/audio data (e.g., the MPEG data) into the recording medium 300 from the file device 200 will be described in detail with reference to a flowchart of FIG. 3.  
[0065]

The file write means 105 initialize an offset value of the PTS value (hereinafter referred to as the PTS offset value) with 0 (step 301).  
[0066]

The file write means 105 acquires the value of the packet stream ID from the packet header of the video/audio data (MPEG data) (step 302), and judges whether or not the value of the packet stream ID indicates the padding stream ID (step 303).  
[0067]

Subsequently, the file write means 105 acquires the PTS value of the video data before start of the padding, when

- 20 -

the value of the packet stream ID is the same as that of the padding stream ID (step 304).

[0068]

Moreover, the file write means 105 skips a data write process into the recording medium 300 until the packet stream ID indicates a value which is not the same as that of the padding stream ID (step 305).

[0069]

The file write means 105 acquires the PTS value of the video data after end of the padding (step 306), and adds a value obtained by subtracting the PTS value of the video data before the start of the padding from the acquired value to the PTS offset value (step 307).

[0070]

The file write means 105 subtracts the PTS offset value from PTS value, or a decoding time stamp (DTS) value of the packet, when the value of the packet stream ID is not the same as that of the padding stream ID. Moreover, the PTS offset value is similarly subtracted from a system clock reference (SCR) value which is reference time information, or a program clock reference (PCR) value which is time information to be added to a transport stream (TS) (step 308).

[0071]

Moreover, the file write means 105 data obtained by correcting the PTS value, DTS value, SCR value, and PCR value as described above into the recording medium 300 (step 309). The process of the steps 302 to 309 is continued to a data terminal end (step 310).

[0072]

Next, a concrete operation example of the edition process of the video edition apparatus according to the first embodiment will be described.

[0073]

- 21 -

As shown in FIG. 4, the video/audio data (MPEG data) includes a data structure referred to as the packet. The header referred to as a packet start code is attached to the top of each packet. In this packet start code, attributes of streams are stored such as video, audio, padding, and private streams.

[0074]

Furthermore, the video data has an edition unit referred to as GOP. The GOP includes data referred to as the one or more I frames which can be decoded alone. Additionally, there are a P frame to be decoded referring to front I, P frames, and a B frame to be decoded referring to front/rear I, P frames.

[0075]

Here, as shown in FIG. 4, at the time of the edition, the user designates the arbitrary deletion start frame and deletion end frame (step 202 of FIG. 2).

[0076]

The display start frame next to the deletion end frame is not the top of the GOP which is the edition unit. In this case, the frames including the display start frame to the next GOP start frame are re-encoded (steps 206 to 208).

[0077]

Moreover, when the attribute of the packet start code of all the video/audio data between the deletion start frame and the deletion end frame is set to the padding packet (private packet), reproduced data is nullified (steps 209, 210).

[0078]

In FIG. 4, hatched displayed frames indicate the re-encoded frames.

[0079]

In this edition process, only partial data of the



- 22 -

part to be deleted is rewritten, and it is therefore possible to execute the edition process at a high rate.

[0080]

Additionally, since the time information such as the PTS, DTS, SCR, and PCR values is discontinuous, the time information becomes wrong depending on a reproduction device. There is a possibility that the video/audio data cannot synchronously be reproduced correctly. In the present invention, when the edited data is duplicated in the recording medium 300 such as rewritable CD and DVD, the padding packet is removed (steps 304 to 307 of FIG. 3). Furthermore, the time information is corrected (steps 308 and 309 of FIG. 3). Therefore, it is possible to finally obtain the video/audio data (MPEG data) such that the file capacity is reduced and correct synchronous reproduction can be performed.

[0081]

In the first embodiment, the process of correcting the time information is carried out at the time of the duplication into the recording medium 300, but this correction process can also be carried out at the time of the edition. In this case, a process time at the time of the edition becomes longer than that in the first embodiment, but the prepared and edited video/audio data (MPEG data) can correctly and synchronously be reproduced regardless of the reproduction device. Moreover, at the time of the duplication into the recording medium 300, the data can be reproduced without performing the correction process of the time information.

[0082]

Moreover, a process for nullifying the removed part of the video/audio data (MPEG data) is realized by rewriting the ID value of the packet start code (packet header) with

- 23 -

the packet stream ID value, but the part can also be nullified, for example, as another private stream. The size of the nullified data may also be stored in the private stream. In this case, when a reproduction device for performing a process of referring to the data size to skip the reading is prepared, it is possible to increase the rate of the file read process.

[0083]

Next, the video edition apparatus according to a second embodiment of the present invention will be described in detail with reference to FIG. 5.

[0084]

Referring to FIG. 5, the video edition apparatus according to the second embodiment of the present invention is constituted of a video edition apparatus 400 which operates by the program control, the file device 200, and the recording medium 300.

[0085]

The video edition apparatus 400 includes edition control means 401, file read means 102, decode means 103, encode means 104, file write means 105, and edition position extraction means 406.

[0086]

Here, the edition control means 401 obtains the range of the video/audio data to be deleted from the deletion start frame and deletion end frame designated by the edition position extraction means 406, and replaces the header of the video/audio data to be deleted with the padding header to nullify the video/audio data.

[0087]

The edition position extraction means 406 extracts a format change point of the audio data, and determines the corresponding video frame.

- 24 -

[0088]

Next, a respect of the operation of the present embodiment different from that of the first embodiment will be described.

[0089]

The edition position extraction means 406 of the present embodiment inspects a format (stereo, monaural, and sound multiplex formats) of the audio data of the whole video/audio data (MPEG data), and extracts all change points of the format.

[0090]

Furthermore, the edition position extraction means 406 extracts the PTS value of the audio data in the change point of the format, and presents start and end frames of the video frames including the PTS value as the reproduction time as the deletion start frame and deletion end frame, that is, edition candidate positions to the user. When the presented edition candidate position is as desired by the user, the edition described in the first embodiment is started as such by an instruction from the user. When the edition candidate position does not meet the user's desire, the user deletes the edition candidate position, or finely adjusts the position to change the position. After performing this process, the edition is started.

[0091]

For the other operations, the operations similar to those of the first embodiment (steps 203 to 211 of FIG. 2, steps 301 to 310 of FIG. 3) are performed, and therefore the description thereof is omitted.

[0092]

It is to be noted that by a combined use of the functions according to the first and second embodiments, the position to be edited may also be designated in accordance

- 25 -

with user's selection.

[0093]

Needless to say, in the above-described video edition apparatus, the functions such as the function of the edition control means 101 of the video edition apparatus 100 are realized in a hardware manner. Additionally, a video edition program (application) 500 for executing the above-described functions is loaded onto the memory of the video edition apparatus 100 constituted of the computer device including the CPU and memory, and is executed. Accordingly, the functions can be realized in a software manner. The video edition program 500 controls the CPU of the video edition apparatus 100 to execute the edition process shown in FIGS. 2 and 3. The video edition program 500 is stored in the recording mediums such as a computer-readable magnetic disk and a semiconductor memory, and is loaded onto the video edition apparatus 100 from the recording mediums.

[0094]

The present invention has been described above in accordance with the preferable embodiments and examples, but the present invention is not necessarily limited to the embodiments or examples, and can variously be modified and practiced within the scope of the technical thought.

[0095]

The MPEG data has been described above as the example of the video/audio data, but the data is not limited to the MPEG data and, needless to say, the present invention can be applied to any data.

[0096]

[Effects of the Invention]

According to the video edition apparatus of the present invention described above, the following superior effects are produced.

- 26 -

[0097]

A first effect lies in that the video/audio data constituted by multiplexing the image and sound data can be edited at the high speed. This is because the means for nullifying the frames of the deleted part of the designated video/audio data is disposed.

[0098]

A second effect lies in that the edited data can also be reproduced even on the usual reproduction device. This is because the means for correcting the time information for the synchronous reproduction of the video and audio data is disposed.

[0099]

A third effect lies in that the data region nullified when duplicating the video/audio data in the recording medium can be removed to effectively use the capacity of the recording medium. This is because the means for judging and removing the data region nullified after the edition at the time of the duplication is disposed.

[Brief Description of the Drawings]

[Fig. 1]

FIG. 1 is a block diagram showing a constitution of a video edition apparatus according to a first embodiment of the present invention.

[Fig. 2]

FIG. 2 is a flowchart showing an operation of an edition process in the video edition apparatus according to the first embodiment of the present invention.

[Fig. 3]

FIG. 3 is a flowchart showing an operation of duplicating process of edited video/audio data in the video edition apparatus according to the first embodiment of the present invention.

- 27 -

[Fig. 4]

FIG. 4 is a diagram showing a concrete operation example of the video edition apparatus according to the first embodiment.

[Fig. 5]

FIG. 5 is a block diagram showing the constitution of the video edition apparatus according to a second embodiment of the present invention.

[Fig. 6]

FIG. 6 is a block diagram showing one constitution example of a video edition apparatus which has heretofore been known.

[Description of Reference Number]

100, 400: video edition apparatus

101, 401: edition control means

102: file read means

103: decode means

104: encode means

105: file write means

300: recording medium

406: edition position extraction means

500: video edition program

- 1 -


[Name of Document] ABSTRACT

[Abstract]

[Subject] There is disclosed a video edition apparatus capable of editing video/audio data in which image and sound data are multiplexed at a high rate.


[Solving Means] The video edition apparatus for editing the video/audio data constituted by multiplexing the image and sound data includes edition control means 101 for rewriting a packet header of video data in a range designated by a deletion start frame and deletion end frame with respect to the video/audio data which is an edition object to constitute nullified data and for rewriting a packet header of audio data including the same synchronous reproduction time in the designated range to constitute the nullified data.

[Selected Drawing] Fig. 1

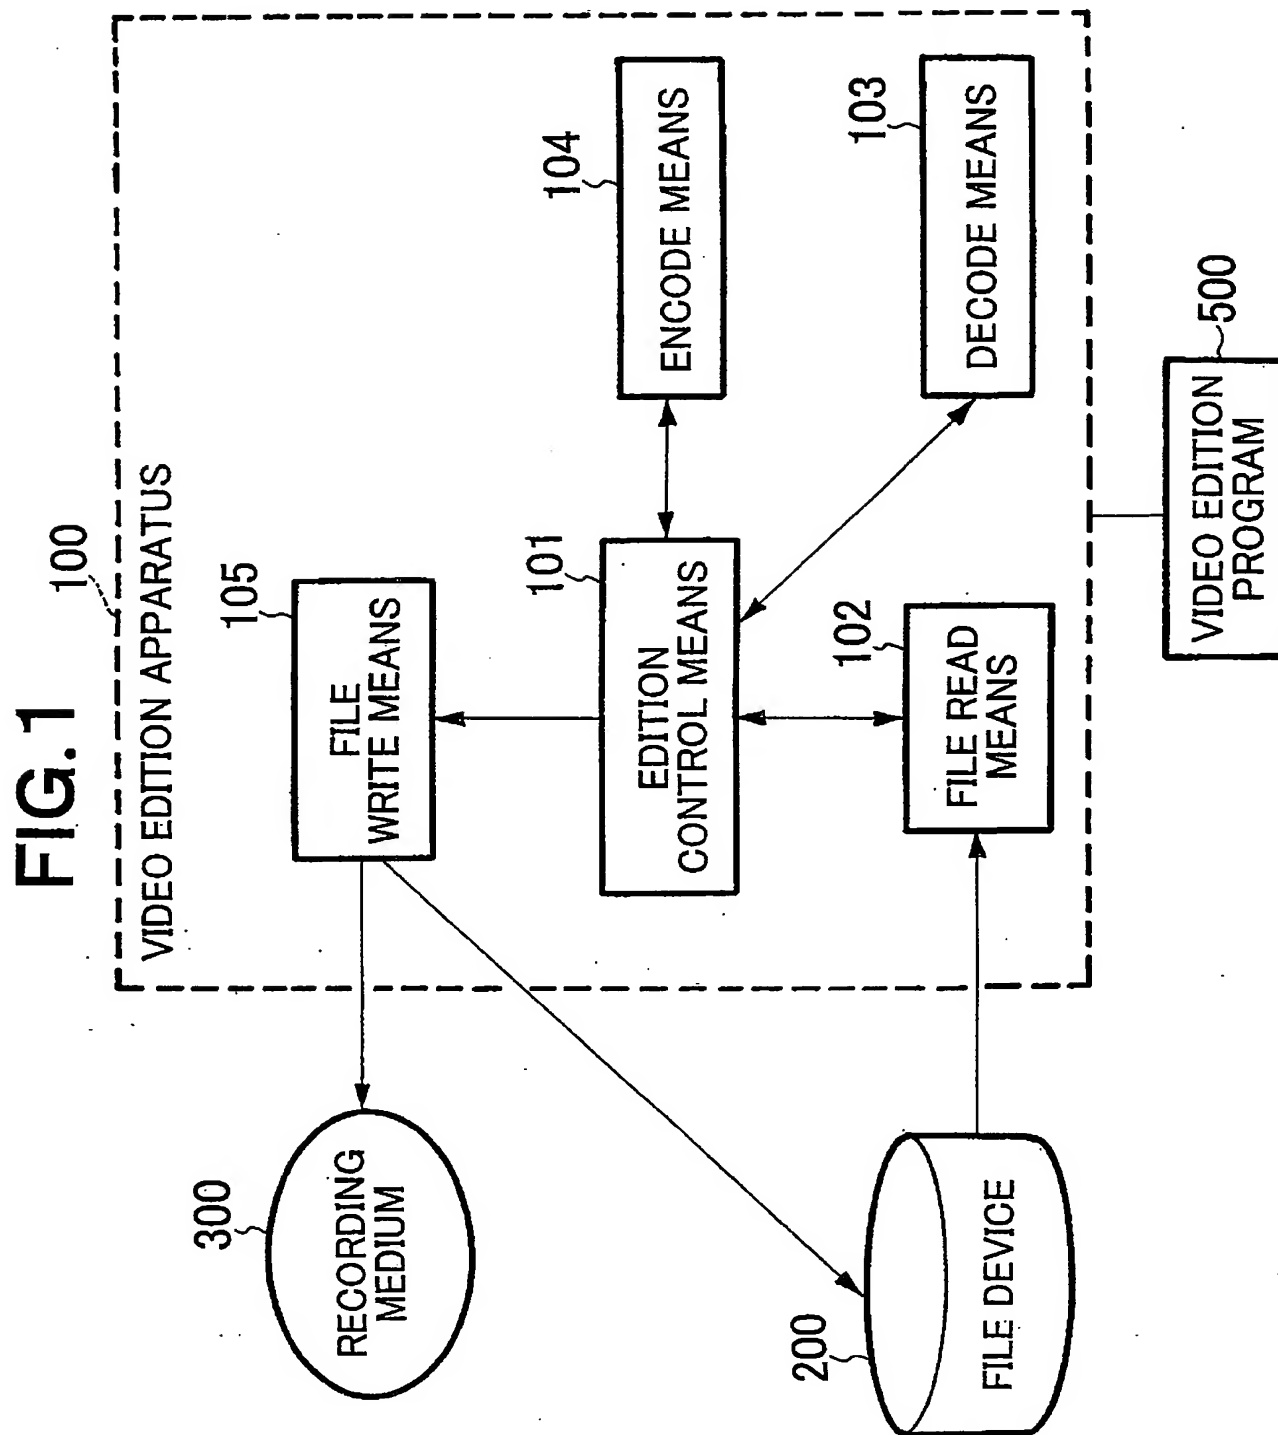



# FIG.2

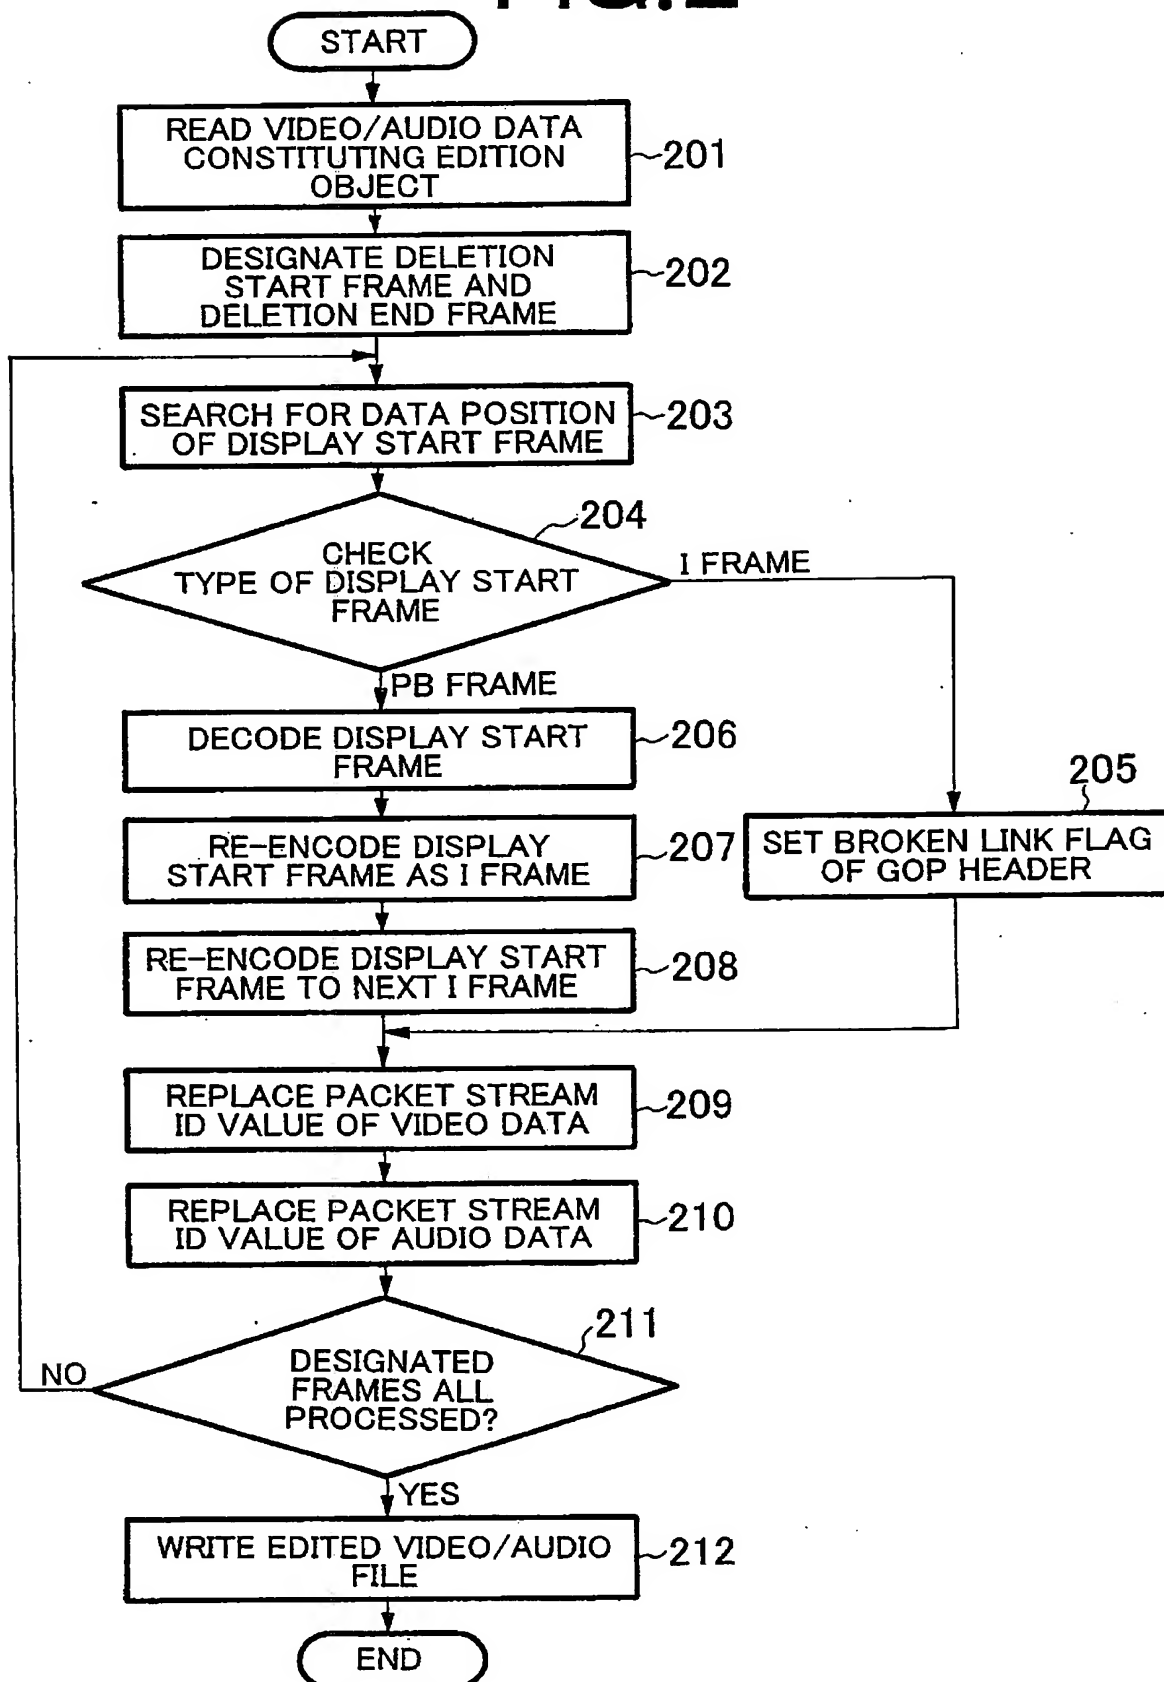

# FIG.3

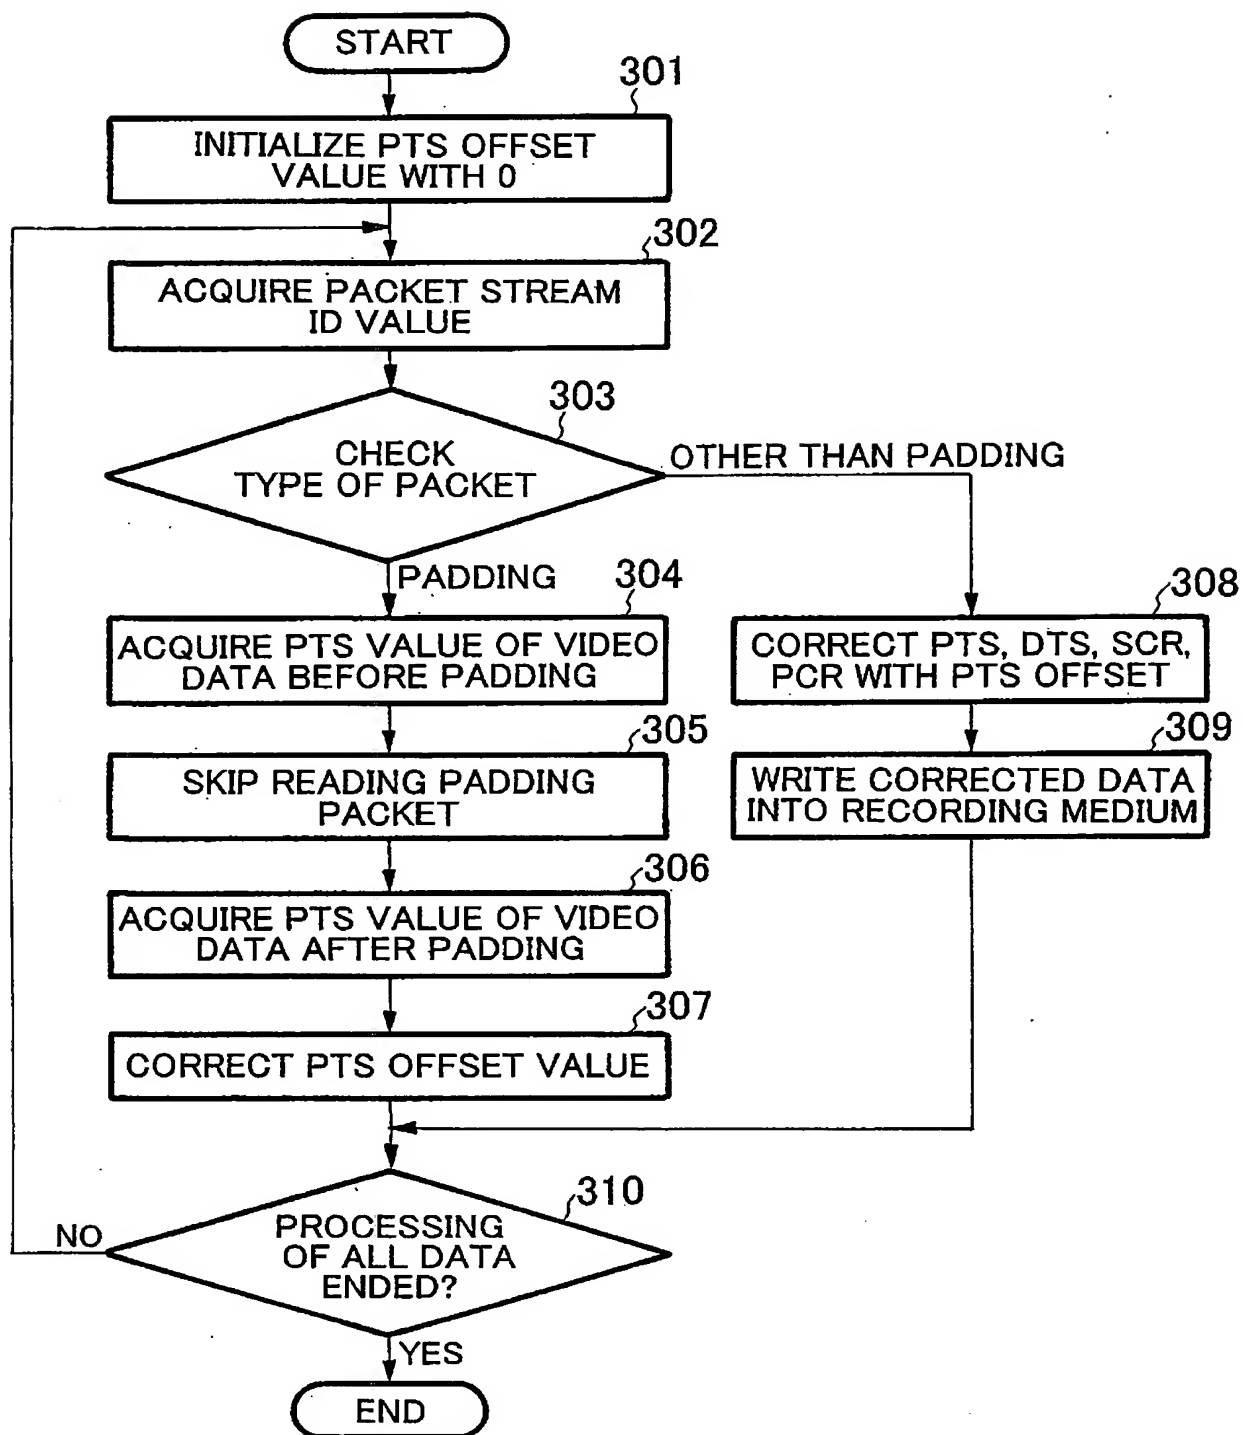
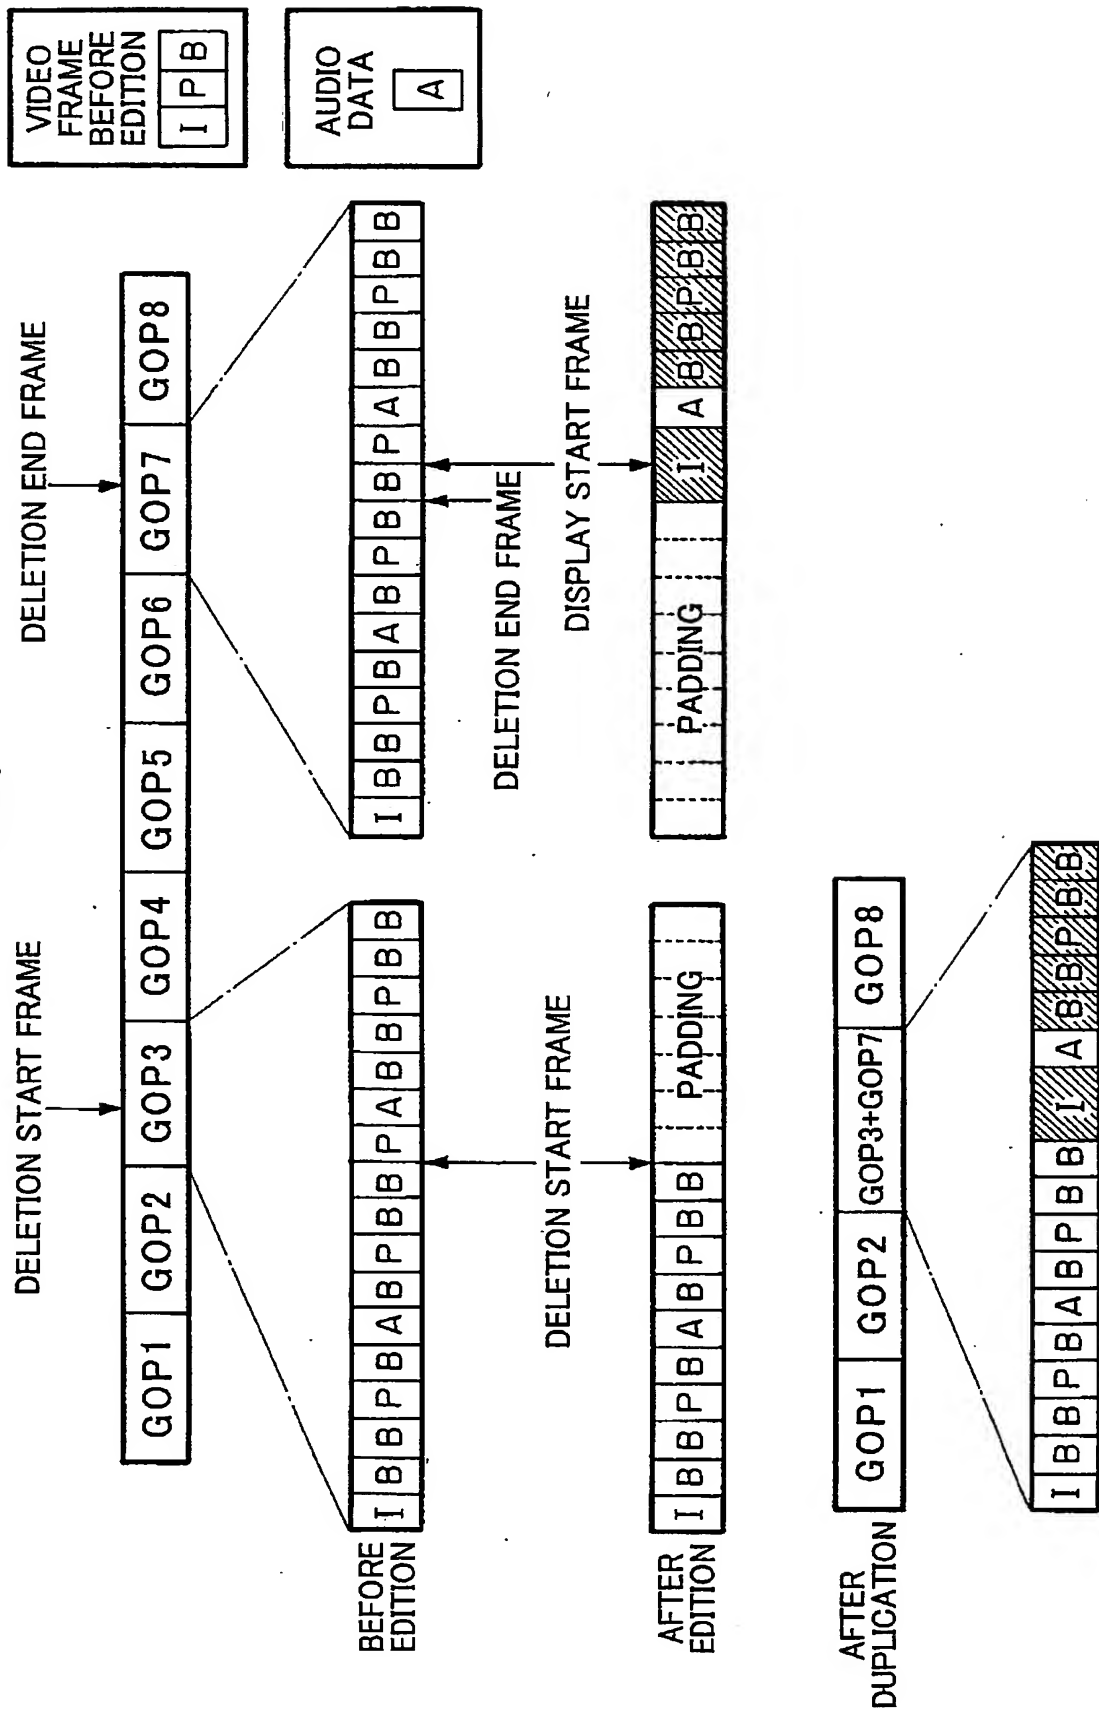


FIG.4



**FIG.5**

400

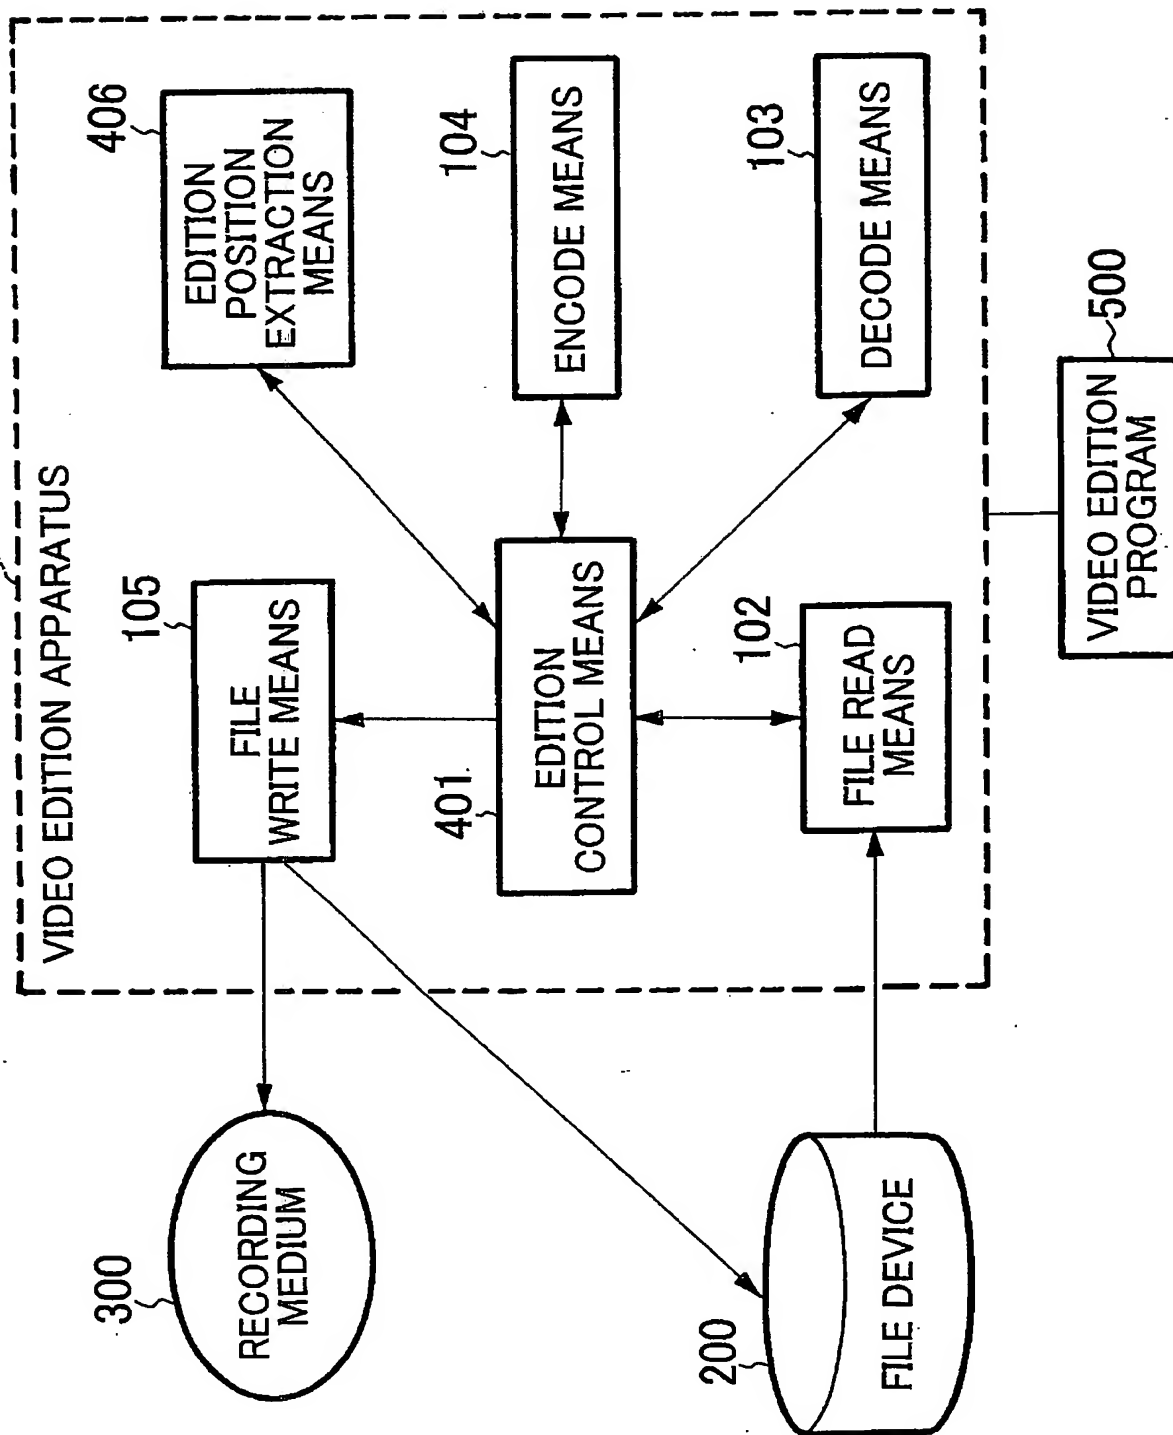


FIG.6

